



Two (2) fibers Detachable DisplayPort Extender



User's Manual for the DPFX-100-TR



Manual Contents

Manual Contents	1-0
Welcome! Product Description	1-1
System Requirements for Setup	1-2
Installation	1-3
Troubleshooting	1-5
Maintenance, Technical Support, and Service	1-6
Product Specifications	1-7
Warranty Information	1-8
Regulatory Statements	1-9

Pictorials

Figure 1 – Overall Connection of DPFX-100-TR	1-1
Figure 2 – Position of the LED	1-3
Figure 3 – Fiber numbering & Caution on both fiber ports	1-3
Figure 4 – Connection of optical fiber	1-4

Welcome!

Congratulations on your purchase of the two (2) fibers DisplayPort extender, DPFX-100-TR. This manual contains information that will assist you in installing and operating the product.

Product Description

New compact optical DisplayPort extender, DPFX-100-TR enables to transmit WQXGA (2560x1600) at 60Hz signal up to 300m (985feet), avoiding any tricks like scaling or data compression for lessening a burden of data transmission. It provides total data throughput 10.8Gbps (2.7Gbps per lane).

The pure fiber connection by two (2) LC fibers connector between transmitter and receiver, gives clean, secure and easy installation with perfect electrical isolation, but without electrical hazard and interference. The DPFX-100-TR can be operated by both USB power by plugging the USB cable and DC power included as a shipping group.

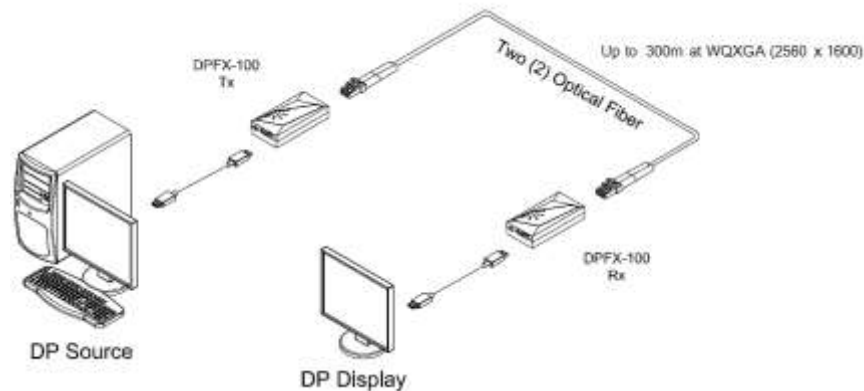


Figure 1 – Overall Connection of DPFX-100-TR

The Shipping Group of DPFX-100-TR;

- One (1) Transmitter (Tx) and One (1) Receiver (Rx)
- Two (2) DP copper cables (0.5m)
- Two (2) USB to DP plug Cables
- Two (2) DC +5V,1A power adapters
- User's Manual
- Option Product:** LC Multi-mode fiber

1-1 Welcome, Product Description

System Requirements for Setup

- Hardware requirements**
 - You have to have a DisplayPort source and display. It should support the maximum graphic resolution feature of displays to be connected.
 - No special requirements of memory size, CPU speed and chipsets, if you've already properly installed your DisplayPort systems or graphic cards.
 - Proper initial trial of the entire platform with its application using a short length copper cable is recommended prior to install with the optical link.
- Software requirements**
 - No special restrictions, if you've already properly installed your Displayport systems.
- Power Technical Advisory**
 - Enclosed Power Adaptors and USB cables supply power to both Transmitter and Receiver.
- Connection Advisory**
 - It is highly recommend that DisplayPort source is directly connected into DisplayPort display output via DPFX-100-TR without connection to incompatible distributor, switcher and selector.

1-2 System Requirements for Setup

Installation

Important: Please keep the installation procedure below. Improper or no operation may result if the start-up sequence is not correctly followed.

Step 1

Carefully unpack the contents in the shipping group.

Step 2

Power on the DisplayPort source and display. Power on both transmitter and receiver by using USB power cable or DC power adapter.

Step 3

Then, the LED (Green color) will begin to blink once a second for three (3) times regularly on both sides.

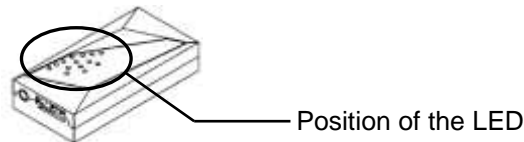


Figure 2 – Position of the LED

Step 4

Connect two (2) LC optical fibers between the transmitter and the receiver and each fiber channel shall be connected as A to A and B to B carefully. Ensure the duplex connectors are fully engaged and then, the top LED will begin to blink regularly.



Figure 3 – Fiber numbering & Caution on both fiber ports

Note1: The maximum extension length by multi-mode fiber is 300 meters.

Note2: Be recommended NOT to use any intermediate cable or adapter between them to avoid undesirable performance degradation.

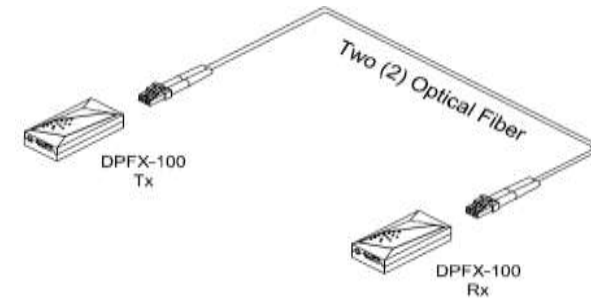


Figure 4 – Connection of optical fiber

Step 5

Connect the transmitter to the Displayport source over DisplayPort copper cable.

Step 6

Connect the receiver to the Displayport source over Displayport copper cable.

Note: If the connectors are fully engaged, the bottom LED will turn on.

Step 7

If the system does not work properly, go to the page 1-5 trouble shooting.

Troubleshooting

The display shows only black screen.

- Ensure that all plugs and jacks used by USB power cables or external power supplies are firmly connected. Ensure that the LED ON.
- Ensure that the DisplayPorts are firmly plugged in to the DisplayPort source and display.
- Ensure that the transmitter and receiver modules plugged correctly to the source and display, respectively.
- Check if the DisplayPort source and display are powered on and properly booted.
- Reset the system by de-plugging and re-plugging the transmitter DisplayPort or receiver DisplayPort, or by de-plugging and re-plugging the USB power cables that are plugged of transmitter and receiver module
- Re-boot up the system while connecting the module.

Screen is distorted or displays noises.

- Check if the graphic resolution is properly set. Go to the display properties and tap the settings. Ensure that the resolution sets less than WQXGA (2560x1600) at 60Hz refresh ratio.
- Reset the system
- Power down, disconnect and reconnect the optical system cable or DC power adaptors, and power up

Maintenance

No special maintenance is required for the optical system cables and power supplies. Ensure that the cables and power modules are stored or used in a benign environment free from liquid or dirt contamination.

There are no user serviceable parts. Refer all service and repair issues to Opticis or its authorized distributor.

Technical Support and Service

For commercial or general product support, contact your reseller. For technical service, contact Opticis by email techsupp@opticis.com or visit its website at www.opticis.com.

Product Specifications

- **Compliance with DisplayPort standard:** supports DP 1.1a
- **Extension limit:** 300m (985feet) for WQXGA (2560x1600) at 60 Hz refresh rate over two (2) LC multi-mode fibers (50/125um).
- **Graphic Transmission Bandwidth:** Supports total data rate 10.8Gbps (2.7Gbps per lane).
- Supports **Dual-mode DP (DP++)**
- Supports **auxiliary I²C channel over fiber**

- **Mechanical specifications of transmitter and receiver**
 - **Dimensions(WDH):** 35mm x 72mm x 16mm
- **Environmental Specifications**
 - Operating temperature: 0°C to 50°C
 - Storage temperature: -30°C to 70°C
 - Humidity: 10% to 80%

AC/DC Power Adapter

- **Power Input:** AC 100-240V, 50/60Hz.
- **Power Output:** +5 V, 1A SMPS DC-power Adapter
- **Cord DC Jack:** Core is + 5 V and outer is GND.
- **Certification:** FCC, CE

1-7 Product Specifications

Warranty Information

1 (One) Year Warranty

Opticis warrants this optical DP module to be free from defects in workmanship and materials, under normal use and service, for a period of one (1) year from the date of purchase from Opticis or its authorized resellers.

If a product does not work as warranted during the applicable warranty period, Opticis shall, at its option and expense, repair the defective product or part, deliver to customer an equivalent product or part to replace the defective item, or refund to customer the purchase price paid for the defective product.

All products that are replaced will become the property of Opticis.

Replacement products may be new or reconditioned.

Any replaced or repaired product or part has a ninety (90) day warranty or the remainder of the initial warranty period, whichever is longer.

Opticis shall not be responsible for any software, firmware, information, or memory data of customer contained in, stored on, or integrated with any products returned to Opticis for repair under warranty or not.

Warranty Limitation and Exclusion

Opticis shall have no further obligation under the foregoing limited warranty if the product has been damaged due to abuse, misuse, neglect, accident, unusual physical or electrical stress, unauthorized modifications, tampering, alterations, or service other than by Opticis or its authorized agents, causes other than from ordinary use or failure to properly use the product in the application for which said product is intended.

Dispose of Old Electrical & Electronic Equipment

(Applicable in the European Union and other European countries with separate systems)



This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product.

The recycling of materials will help to conserve natural resources. For more detailed information about recycling of this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

1-8 Warranty Information

FCC/CE Statement for regulation of Electro-magnetic emission

This device complies with part 15 of FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 and 2 of FCC Rules, EN 55022/55024/61000-3 for CE certification. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction guide, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-orient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult a service representative for help.

Properly shielded and grounded cables and connectors must be used in order to comply with FCC/CE emission limits. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

© 2013 Opticis Co., Ltd. All Rights Reserved
Revision 1.0. Feb. 2013

Opticis Locations

OPTICIS HQ

Opticis Co., Ltd.

16Fl, Kins Tower Jeongja 331,
8 Sungnam-daero, Bundang-gu
Sungnam-si, Gyunggi-do, 463-782
South Korea

Te l: +82 (31) 719-8033

Fax: +82 (31) 719-8032

www.opticis.com

For order support, please contact your Distributor or Reseller.

For technical support, check with the Opticis web site www.opticis.com or contact techsupp@opticis.com