

 **Alctron** 爱克创



DI2600N 无源DI盒

DI2600N Passive DI Box

用户手册

Owner's Manual

目 录

English

1. GENERAL INTRODUCTION.....	2
2. INTRODUCTION OF EACH BUTTON	2
3. FEATURES.....	3
4. SPECIFICATION.....	3
5. SERVICE.....	3



中文

一、产品描述.....	4
二、各按钮的功能介绍.....	4
三、特征.....	5
四、产品参数.....	5
五、保修.....	5


GENERAL INTRODUCTION

DI2600N is a passive direct box which is plug-and-play easy to use. It allows you to take a prerecorded track and send it back to a guitar or bass amplifier and re-record it. Various buttons let you tame excessive highs, warm up the lows. The mute function has also been added to allow you to shut off the signal going to the amps when making adjustments or moving microphones around the studio. DI2600N is no longer just for guitars. It is now common to bass, keyboards, drums violin and so on.

THE INTRODUCTION OF EACH BUTTON

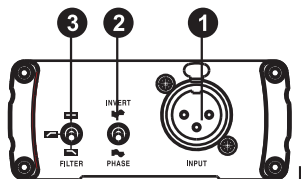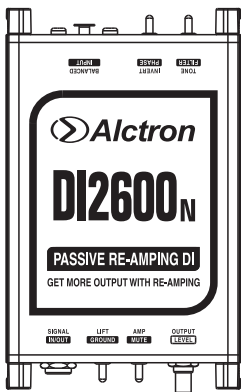


Front View

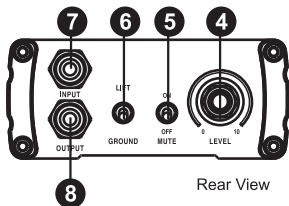

Rear View

- 1.INPUT: input connector to connect hi-z devices.
- 2.INVERT PHASE: dial to the PHASE it indicates that the input and output phase is the same; dial to the INVERT it indicates that the input and output phase is opposite.
- 3.FILTER: adjust the output signal's high/low level.
- 4.LEVEL: adjust the output connector's level.
- 5.MUTE: dial to the ON position, there is no signal on output connector.
- 6.GROUND LIFT: disconnect input ground output to stop hum and buzz.
- 7.INPUT: input connector, connect to the hi-Z instrument.
- 8.OUTPUT: output connector, connect to low-z devices.

CONNECTION

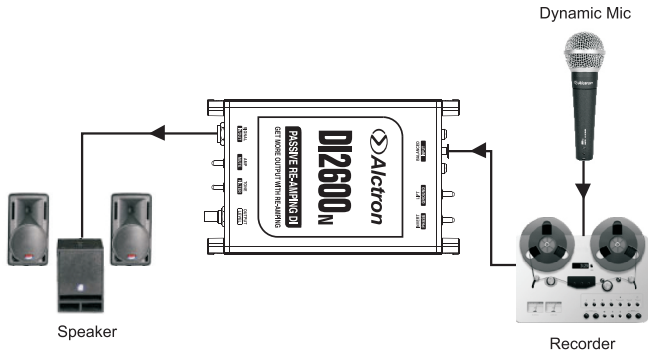

FEATURE

- * Handles loud transient without chocking or clipping;
- * No batteries required, works with phantom-power;
- * Alum shell, durable and stable;
- * Smooth curve and low distortion.

SPECIFICATION

- * Audio circuit type: passive, transformer isolated
- * Frequency response: 20hz-20khz
- * Common mode rejection ratio: -55dB@55hz
- * Dynamic range: 140dB
- * Max input: +26dBu
- * Input impedance: 900ohms
- * Output impedance: 1500ohms
- * Size: 146mm x 90mm x 40mm

Copyright © Ningbo Yinzhou Alctron Electronics Co.,Ltd. All rights reserved. Specifications and appearance subject to change without notice.

Ningbo Alctron Electronics Technology CO.,LTD.

No.76 SanCheng Road, XiuFeng Industrial Area,GaoQiao Town, NingBo, China.

Tel:+0086 574 87150672

Fax:+86 574 87157176



E-mail:info@alctron-audio.com

www.alctron-audio.com

产品简介


DI2600N是一款即插即用的无源DI盒。您可以将吉他和贝斯的信号通过放大器后再通过本DI盒导入录音设备。多种按钮能够让您轻松调节高频和低频。此款DI盒还配有一个静音开关，当您需要做些适当的调节或者移动一下麦克风只需要把静音开关拨到ON的位子就能实现静音功能了。DI2600N 已经不仅仅适用于吉他可也适用于贝司，电子琴，小提琴等等。

各按钮的功能介绍

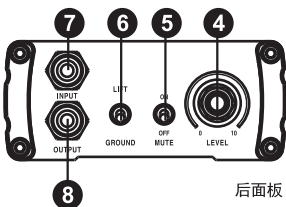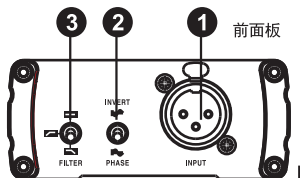

1. INPUT: 输入接口，连接高阻抗设备。
2. INVERT PHASE: 开关拨到PHASE，说明输入和输出相位相同；开关拨到INVERT，说明输入和输出相位相反。
3. FILTER: 对输出信号进行高、低通切换调节。
4. LEVEL: 调节产品输出端的电平大小。
5. MUTE: 静音开关，拨到ON的位子，OUTPUT端无信号输出。
6. GROUND LIFT: 接地开关，从输出端断开输入接地，从而消除了哼声和吱声。
7. INPUT: 输入接口，连接高阻抗乐器。
8. OUTPUT: 输出接口，连接低阻设备。

连接

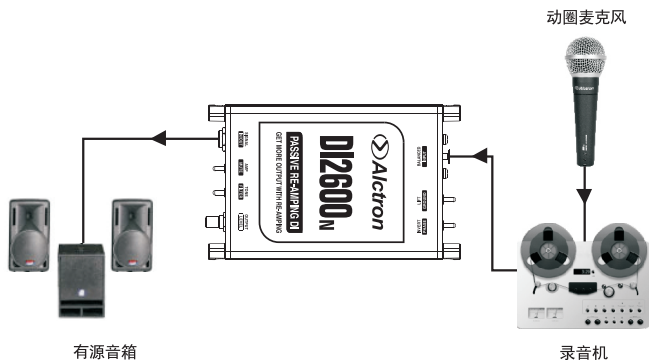

产品特点

- * 无抑制或削波的处理大瞬态;
- * 无需电池, 用幻相电源供电;
- * 铝合金壳身, 持久耐用;
- * 曲线平滑, 低失真。

产品参数

- * 音频类型: 无源,有变压器
- * 频响: 20hz-20khz
- * 共模抑制比: -55dB@55hz
- * 动态范围: 140dB
- * 最大输出: +26dBu
- * 输入阻抗: 900 ohms
- * 输出阻抗: 1500 ohms
- * 尺寸: 146mm x 90mm x 40mm

版权所有©宁波市鄞州奥创电子有限公司,所有权保留。必要的技术数据和外观更改恕不予以另行通知。

宁波奥创电子科技有限公司

地址: 浙江省宁波市海曙区秀丰工业区三成路76号

电话: +86 574 87150673

传真: 0574-87157176

邮箱: sales@alcrtron-audio.com

网址: <http://www.alcrtron-audio.com>

全国统一服务热线: 4000-160-112