


TS-0323 Multi-function extension box for full digital conference system

Feature

- 1.Unique appearance design.
- 2.With the function of extending the network.
- 3.With power supply function.
- 4.One-in-three-out connection unit supports network functions and has communication instructions.
- 5.Connect the controller and the unit to realize the interface extension function.
- 6.100M network transmission, hand in hand cascade.
- 7.Three switch controller ports, SSRAM, 10/100M Ethernet ports, each interface supports IEEE802.3, IEEE802.3u,IEEE802.3x standard. With strong anti-interference ability.

Product function introduction

- 1.LINK——Connect to the third-generation conference controller or the NEXT port of an extension box.
- 2.Power input interface, DC 36V input.
- 3.NEXT——used to connect to the next multi-function extension box.
- 4.6.——Connect the speech unit of TS-03 series.
- 5.——Set the unit switch that is connected to 02 or 03, and connect 02 to the speech unit of TS-02 series; connect 03 to the speech unit of TS-03 series.

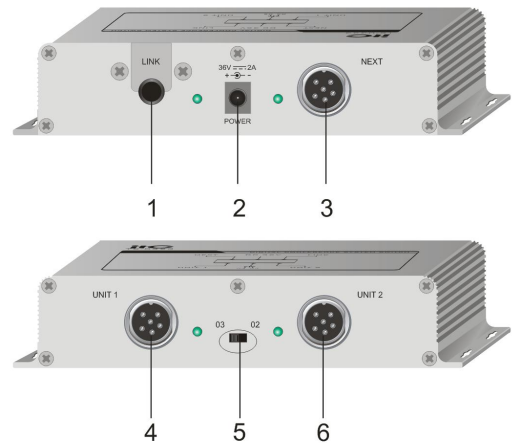

Note:

Port LINK is to connect the third generation conference controller DELEGATES port or another TS-0323 Port. Port NEXT/UNIT1/UNIT2 can be used for external TS-03 Series unit or another TS-0323 equipment. Please refer to the system connection diagram and apply the TS-0323 port LINK to the Delegates interface of the third-generation conference controller. The LINK status indicator will always flash green after the network connection is normal. The same applies to the status indicator of the port NEXT/UNIT1/UNIT2.

Technical Specification

Model	TS-0323
Power consumption	2.5W
Supply voltage/current	36V/2A
Connection method	Dedicated cable (6-PIN aviation wire)
Colour	Silver
Operating temperature	0°C ~ 60°C
Environmental temperature	20% ~ 80% relative humidity, no condensation
Weight	610g
Dimension (LxWxH)	180×111×40mm